



AVOR

The logo features the word "AVOR" in a bold, sans-serif font. The letters 'A', 'V', and 'R' are dark blue, while the letter 'O' is a vibrant red. The 'O' is stylized with a white, swirling, spiral-like pattern inside it. The text is centered horizontally and overlaid on a white circular graphic that has several short, white tick marks extending outwards from its perimeter, resembling a compass or a technical diagram. The background is a smooth gradient transitioning from a light orange at the top to a light blue at the bottom.

Product

1

AVer Conference
Camera

2

AVer EVC
Series

3

AVer SVC
Series

4

Distance Learning
with Auto Tracking

5

AVer PTZ and
PTC

6

AVer
Visualizer

7

AVer Charing
Cart

8

EZCastPro

9

CYP

AVor

Conference

Camera

VC540



4K



Bluetooth



16X Zoom



Auto Framing



Expansion
Speakers/Microphones




USB Plug and Play



VC520Pro2



Full HD 1080p



84.5° horizontal FOV



18X Total Zoom



Auto Framing



Sony True WDR



Video Streaming



Expansion
Speakers/Microphones




USB Plug and Play

NEW PRODUCT

VB342Pro



4K PTZ camera



Wide FOV 92°



AVer Audio Fence



Beamforming technology



Smart Speaker



Auto framing



Smart Gallery



USB Plug and Play



VB342+



4K

4K ULTRA HD

120°

Wide FOV 120°

WDR

True WDR



SmartFrame



Smart Speaker



USB Plug and Play

zoom

Certified

Certified for

Skype for
Business

Certified for

Microsoft
Teams

VB130



4K

4K ULTRA HD

120°

Wide FOV 120°

WDR

True WDR



SmartFrame



Smart Speaker



USB Plug and Play

zoom

Certified

CAM130



Sony 4K True WDR



Wide 120° FOV



Intelligent Lighting



SmartFrame



Antibacterial Surface

NEW PRODUCT

CAM550



4K

4K Dual Lens PTZ Conferencing Camera



Dual Lens

24x

24X Total Zoom



Gesture Control



Dynamic Framing



Video Streaming



Smart Gallery



USB Plug and Play

CAM540



4K

4K ULTRA HD



SmartFrame

16X


16X Total Zoom

86°
FOV

86° Wide field of view



USB Plug and Play





CAM520Pro2



Full HD 1080p



Auto Framing



18X Total Zoom



84.5° horizontal FOV



Sony True WDR



Video Streaming



USB Plug and Play

CAM520Pro(PoE)



Full HD 1080p



18X Total Zoom




Sony True WDR



Power over Ethernet



SmartFrame



82° horizontal FOV



Video Streaming



USB Plug and Play

HDMI™ HDMI Out


Fone540



Bluetooth



Flexible
Connectivity



Noise Suppression



Clear Led
Indicator

Compatible with Popular Cloud-Based Service Providers



AVor

EVC Series

EVC170



Specification (Codec)

H.323, SIP standards

Point to Point System

Can Upgrade to 4 Sites

HD1080p (1920 x 1080) , up to $\pm 130^\circ$ pan; $+90^\circ/-25^\circ$ tilt
30fps

HDMI Input and Output

One-touch recording

USB direct recording

Connect up to 4 microphones
via daisy-chain

Specification (Camera)

2-megapixel CMOS sensor

18X total zoom

72° FOV (H); 43° FOV (V);
 82° FOV (D)

Security

AES (Advanced Encryption Standard)
function (128-bit)

Password protection for system
settings

Password protection for remote system
management

EVC150



Specification (Codec)

H.323, SIP standards

Point to Point System

HD1080p (1920 x 1080) , up to 30fps

VGA Input

HDMI Output

One-touch recording

USB direct recording

Connect up to 4 microphones via daisy-chain

Specification (Camera)

2-megapixel CMOS sensor
18X total zoom

±130° pan; +90°/-25° tilt
72° FOV (H); 43° FOV (V);
82° FOV (D)

Security

AES (Advanced Encryption Standard) function (128-bit)

Password protection for system settings

Password protection for remote system management

AVer

SVC Series

SVC10



Security

AES (Advanced Encryption Standard) function (128-bit)
Password protection for system settings
Password protection for remote system management

Specification (Codec)

H.323, SIP standards, SIP TLS
HD1080p (1920 x 1080) , up to 60fps

HDMI Input และ Output

Streaming ผ่าน Facebook หรือ YouTube

Supports Dual-Camera/Dual-Presentation

One-touch recording

Built-in 32G Recording Storage Capacity

Connect up to 4 microphones via daisy-chain

Support 1 to 1 site and can

Upgrade up to 16 Sites

Specification (Camera)

2-megapixel CMOS sensor

18X total zoom

$\pm 110^\circ$ pan; $+25^\circ/-25^\circ$ tilt

72° FOV (H); 43° FOV (V); 82° FOV

SVC50



Security

AES (Advanced Encryption Standard) function (128-bit)
Password protection for system settings
Password protection for remote system management

Specification (Codec)

H.323, SIP standards, SIP TLS
HD1080p (1920 x 1080) , up to 60fps
HDMI Input และ Output
Streaming ผ่าน Facebook หรือ YouTube
Supports Dual-Camera/Dual-Presentation
One-touch recording
Built-in 32G Recording Storage Capacity
Connect up to 4 microphones via daisy-chain
Support 6 sites and can Upgrade to 16 Sites

Specification (Camera)

2-megapixel CMOS sensor
18X total zoom
 $\pm 110^\circ$ pan; $+25^\circ/-25^\circ$ tilt
 72° FOV (H); 43° FOV (V); 82° FOV



**Distance Learning with
Auto Tracking**

NEW PRODUCT

DL10



Portable & Light-Weight



1080p 2 Megapixels



Gesture Control



Built-In Mic



IP & USB Outputs



6X Total Zoom



3 AI Tracking Modes

DL30



Distance Learning



Hybrid Classroom



Full HD 1080p
Resolution



12X Optical Zoom



Presenter Mode



Zone Mode



Hybrid Mode



IP / USB Outputs



AVor

PTZ and PTC

PTZ310



Full HD 1080p



12X Optical Zoom



72.5° (Wide)



SmartFrame



SmartShoot



Pan/Tilt (Manual)

HDMI™ HDMI Out

PTZ310N



NDI®|HX



Full HD 1080p



12X Optical Zoom



72.5° (Wide)



SmartFrame



SmartShoot



Pan/Tilt (Manual)


HDMI™

HDMI Out

PTZ330



Full HD 1080p



30X Optical Zoom



67° (Wide)



SmartFrame



SmartShoot



Pan/Tilt (Manual)

HDMI™ HDMI Out


PTZ330N



NDI®|HX



Full HD 1080p



30X Optical Zoom




67° (Wide)



SmartFrame



SmartShoot



Pan/Tilt (Manual)

HDMI™

HDMI Out

PTC310



Full HD 1080p
Resolution



12X Optical Zoom



Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/
USB/3G-SDI



Intuitive Web UI



Exclusive Ceiling
Mount

PTC310N



NDI®|HX



Full HD 1080p
Resolution



12X Optical Zoom



Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/
USB/3G-SDI



Intuitive Web UI



Exclusive Ceiling
Mount

PTC330



Full HD 1080p
Resolution



30X Optical Zoom




Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/
USB/3G-SDI



Intuitive Web UI



Exclusive Ceiling
Mount

PTC310H



4K Ultra HD
Resolution



12X Optical Zoom



Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/USB



Intuitive Web UI



Exclusive Ceiling
Mount

PTC310HN



NDI®|HX



4K Ultra HD
Resolution



12X Optical Zoom



Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/USB



Intuitive Web UI



Exclusive Ceiling
Mount

PTC310U



4K Ultra HD
Resolution



12X Optical Zoom




Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/
USB/3G-SDI



Intuitive Web UI



Exclusive Ceiling
Mount

PTC310UN



NDI®|HX



4K
Ultra HD

4K Ultra HD
Resolution

12X+
ZOOM

12X Optical Zoom



Human Detection AI



Presenter Mode



Zone Mode



IP/HDMI/
USB/3G-SDI



Intuitive Web UI



Exclusive Ceiling
Mount

PTC115+



Full HD 1080p



15X Optical Zoom



3 Tracking Modes:
Wide Area, Stage,
Segment



Output USB / IP /
HDMI / 3G-SDI


PTC500+



Full HD 1080p



3 Tracking Modes:
Wide Area, Stage,
Segment



30X Optical Zoom



USB / IP / HDMI /
3G-SDI Output

CL01

PTZ Camera Controller



Pan/Tilt/Zoom
Speed Control



Control
255 PTZ Cameras



Multiple Control
Interfaces



VISCA/
Pelco-D/P


AVor

Visualizer

M5




Full HD 1080p 60fps



16X Digital Zoom




8M Total pixels



A3 Shooting Area



USB Plug & Play



For Distance Learning



AVer Touch software for AVer Visualizer

M11-8MV



Full HD
1080p

Full HD 1080p 60fps

8
MP

8M Total pixels

+
20x

20X Digital Zoom

3
Outputs

HDMI / VGA / USB Outputs

2Y

2-Year Warranty



AVer Touch software for AVer Visualizer

F17-8M



Full HD 1080p 30fps



8M Total pixels



27.2X total zoom



HDMI/VGA
Input and Output



3-Year Warranty



AVer Touch software for AVer Visualizer

F50-8M



Full HD 1080p 60fps



8M Total pixels



204X total zoom



HDMI/VGA
Input and Output



3-Year Warranty



AVer Touch software for AVer Visualizer

M15-13M



4K 60fps



23X total zoom



13MP

13M Total pixels



A3 Shooting Area



USB & HDMI
Connections



3-Year Warranty



AVer Touch software for AVer Visualizer

M17-13M




Full HD 1080p 60fps




35.2X total zoom



13M Total pixels



One Touch Record
Internal 128MB



USB & HDMI
Connections



3-Year Warranty



Aver Touch software for AVer Visualizer

TECH LEARNING
BEST SHOW
TCEA
WINNER
2019

GOLDEN
PIN 2018
DESIGN
AWARD



M15W



4K 60fps



23X Digital zoom



13M Total pixels



Dual Band Wi-Fi



Rechargeable
Li-ion Battery



A3 Shooting Area



HDMI Out



3-Year Warranty



AVer Touch software for AVer Visualizer



M70W



4K 60fps



230X Total zoom




13M Total pixels



Dual Band Wi-Fi



Rechargeable
Li-ion Battery



One Touch Record
Via USB



HDMI In/Out



3-Year Warranty



AVer Touch software for AVer Visualizer

M90UHD



4K Ultra HD



322X Total Zoom
14X optical and 23X digital zoom




13M



60fps



A3 Shooting Area



HDMI / VGA / USB
Outputs



3-Year Warranty



AVer Touch software for AVer Visualizer

AVer

Charging Cart

E24



24 Bays for tablets,laptops&Chromebooks
Charge Cart

14" Laptop Capacity

Smart Minimalist cable management

Cycle Charging

2 points lock on door



E32c



32 Bays for tablets,laptops&Chromebooks
Charge Cart

14" Laptop Capacity


Smart Minimalist cable management

Cycle Charging

2 points lock on door




C20

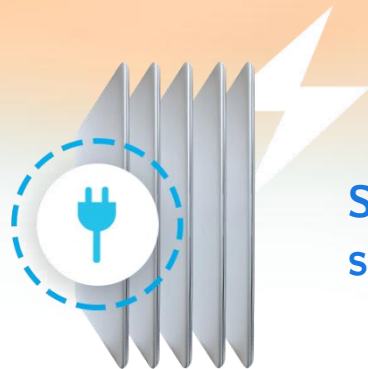

Smooth and seamless charging




Built for 20 devices



Laptop/Chromebook/Tablets up to 16"




C36i



Laptop/Chromebook/Tablets up to 15"

Built for 36 devices

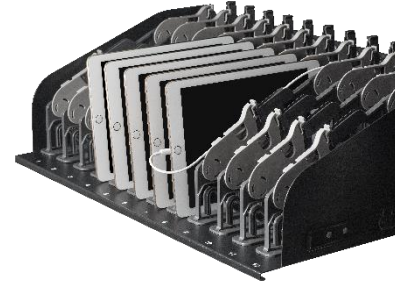

Adaptive intelligent charging

X4



42 bays, tablets, laptops & Chromebooks Charge Cart

Up to 15" screen

Adjustable slot design and innovative cable management

Intelligent charging system Build-in chipset)

Innovative cable management (New Design)

3 points lock on door


C30



Full 2.1A

30 bays, iPads/tablets
charge & sync cart

USB ports are installed in at
front for easy plugging

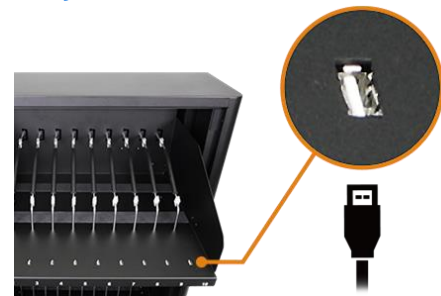

Real-time status
check-up



EZCast




EZCastPro II



4K Compatibility

Support 802.11ac
5GHz Wi-Fi

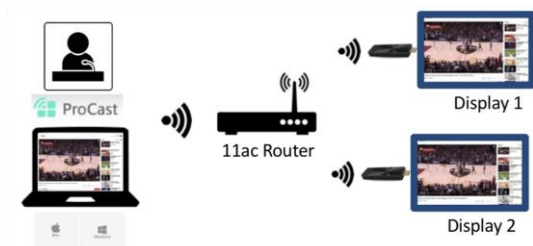

Multiple Device
Broadcast App Procast

Cross Platform Support



EZCastPro Box II



4K Compatibility

Support 802.11ac
5GHz Wi-Fi



Cross Platform Support

QuattroPod Lite



Plug and cast
No app required

Cross Platform
Support



Support Mobile
Device

QuattroPod Mini

Input : 1080p
Output : 4K



Support 802.11ac
5GHz Wi-Fi



Cross Platform
Support



Support Mobile
Device



QuattroPod USB



Input : 1080p
Output : 4K



Support 802.11ac
5GHz Wi-Fi



Cross Platform
Support



Support Mobile
Device

QuattroPod



4K @30fps



Support 802.11ac
5GHz Wi-Fi

Cross Platform
Support




Support Mobile
Device



CYP

CH-1527TX

CH-1527RX

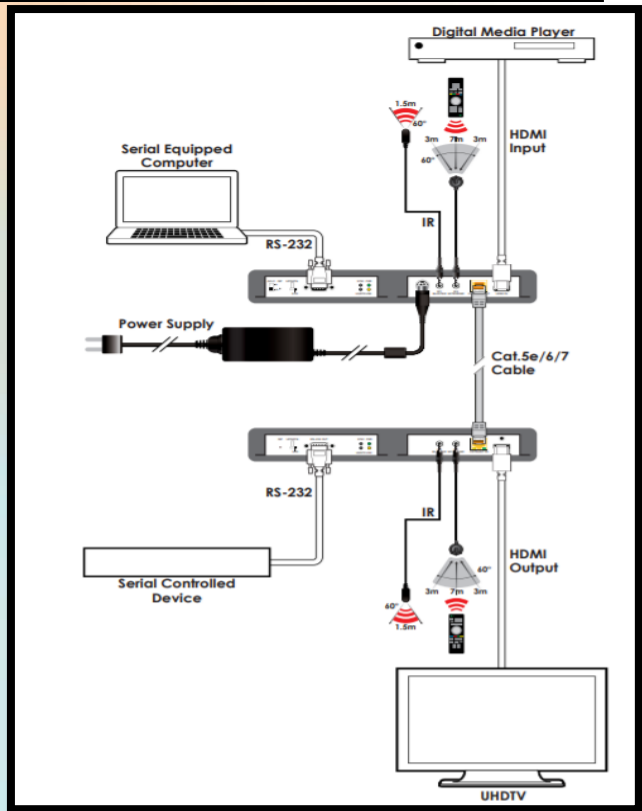

- รองรับ HDR (High Dynamic Range), 4K@60Hz (18Gbps, 4:4:4)
- รองรับ สัญญาณ HDMI ขาเข้าและ สัญญาณ HDMI ขาออก สูงสุด 4K
- ส่งสัญญาณ HDMI แบบไม่บีบอัดข้อมูลผ่าน สายสัญญาณ Cat.5e/6/7 ได้ระยะทาง ที่ 70m สำหรับ 1080p และ 35m สำหรับ 4K
- รองรับคุณสมบัติของ HDBaseT ในการควบคุม IR แบบ 2 ทิศทาง และ RS-232
- รองรับการจ่ายกำลังไฟฟ้าจากเครื่องส่ง สัญญาณไปยังเครื่องรับสัญญาณ (รุ่นที่กำหนดไว้เท่านั้น)

Wall Plate TX CH-2537TXWPUS RX CH-2527RX



- รองรับ 1 HDMI , 1 VGA + Audio 3.5 mm.
- รองรับ 4K@60Hz (18Gbps, 4:4:4)
- รองรับ สัญญาณ HDMI ขาเข้า สูงสุด 4K
- ส่งสัญญาณ HDMI แบบไม่บีบอัดข้อมูลผ่านสายสัญญาณ Cat.5e/6/7 ได้ระยะทางที่ 100m สำหรับ 1080p และ 70m สำหรับ 4K
- พอร์ต USB สำหรับ อัปเดต Firmware
- รองรับ การจ่ายกำลังไฟฟ้าจากเครื่องรับสัญญาณ (รุ่นที่กำหนดไว้เท่านั้น)

4x4 HDMI 4K UHD+ Matrix with USB Power Outputs CPLUS-V4H4HP



- รองรับสัญญาณ HDMI สูงสุด 4K
- รองรับสัญญาณขาเข้า 4 HDMI และ สัญญาณขาออก 4 HDMI
- รองรับความละเอียดสูงสุด 4096x2160@60Hz (4:4:4, 8-bit)
- รองรับค่าสี 16-bit Deep Color สูงสุด 1080p@60Hz
- รองรับการจัดการ EDIDs
- มีจอแสดงผลชนิดตัวอักษรด้านหน้าตัวเครื่อง
- สามารถควบคุมด้วยปุ่มกดด้านหน้าตัวเครื่อง, WebGUI, Telnet, RS- 232, และ IR remote

4x1 HDMI Switcher CLUX-41N



- รองรับสัญญาณขาเข้า 4 HDMI และ สัญญาณขาออก 1 HDMI
- รองรับความละเอียดสูงสุด 1080p@60 และ 1920x1200
- รองรับการสลับสัญญาณแบบอัตโนมัติ พร้อมไฟ LED แสดงสถานะ
- สามารถควบคุมผ่านหน้าตัวเครื่อง
- รองรับการควบคุมผ่านรีโมท
- สามารถจดจำสถานะสัญญาณขาเข้าก่อนปิดเครื่อง

2x1 HDMI Switcher CLUX-21N

- รองรับสัญญาณขาเข้า 2 HDMI และ สัญญาณขาออก 1 HDMI
- รองรับความละเอียดสูงสุด 1080p@60 และ 1920x1200
- รองรับการสลับสัญญาณแบบอัตโนมัติ พร้อมไฟ LED แสดงสถานะ
- สามารถควบคุมผ่านหน้าตัวเครื่อง
- สามารถจดจำสถานะสัญญาณขาเข้าก่อนปิดเครื่อง



4K UHD 1x4 HDMI Splitter CPRO-U4T




- รองรับสัญญาณขาเข้า 1 HDMI และ สัญญาณขาออก 4 HDMI
- รองรับความละเอียดสูงสุด 4096x2160@60Hz


4K UHD 1x8 HDMI Splitter CPRO-U8T



- รองรับสัญญาณขาเข้า 1 HDMI และ สัญญาณขาออก 8 HDMI
- รองรับความละเอียดสูงสุด 4096x2160@60Hz

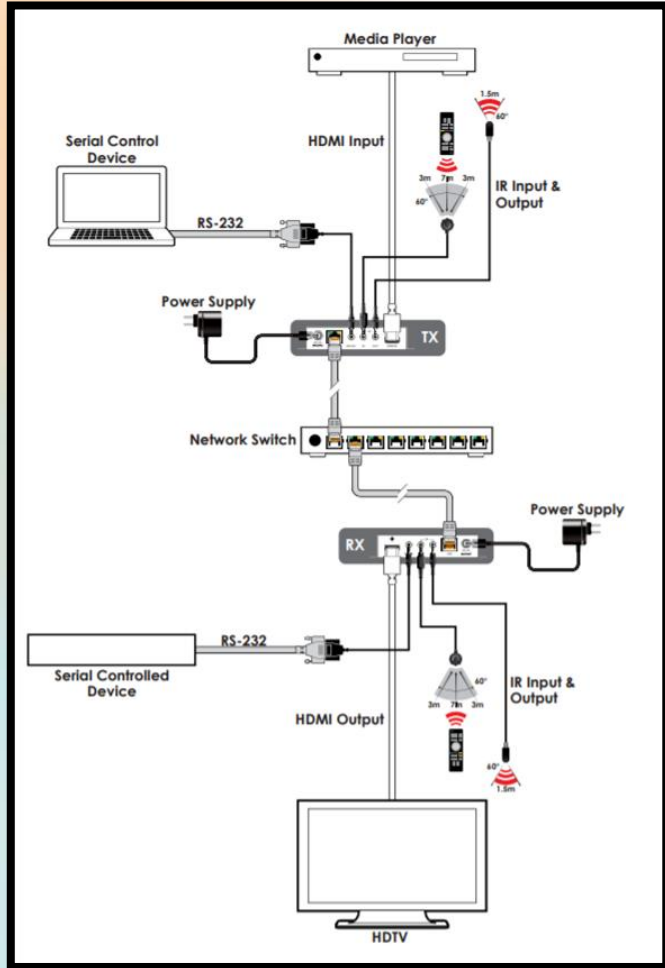


- CH-331H-TX รองรับสัญญาณขาเข้า 1 HDMI
- CH-331H-RX รองรับสัญญาณขาออก 1 HDMI
- รองรับการส่งสัญญาณภาพและเสียงบนเครือข่ายคอมพิวเตอร์ แบบ Unicast (point-to-point)
- รองรับการส่งสัญญาณภาพและเสียงบนเครือข่ายคอมพิวเตอร์ แบบ Multicast (single-to-many) ด้วย Ethernet Switch
- รองรับสัญญาณ HDMI ความละเอียดสูงสุด 1080p@60
- รองรับการส่งผ่านสัญญาณ IR และ RS-232
- รองรับการควบคุมด้วยปุ่มกดหน้าเครื่อง WebGUI, Telnet
- รองรับการควบคุมผ่านเครือข่ายคอมพิวเตอร์ ด้วยอุปกรณ์ควบคุม (CDPS-CS7)

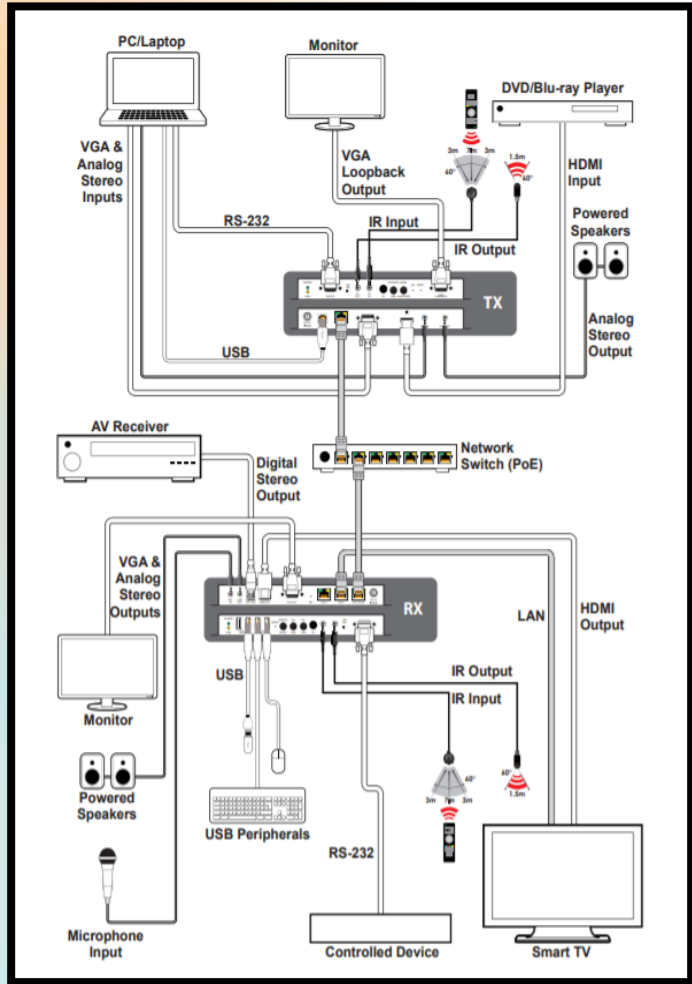


- CH-U331TX รองรับสัญญาณขาเข้า 1 HDMI
- CH-U331RX รองรับสัญญาณขาออก 1 HDMI
- รองรับการส่งสัญญาณภาพและเสียงบนเครือข่ายคอมพิวเตอร์ แบบ Unicast (point-to-point)
- รองรับการส่งสัญญาณภาพและเสียงบนเครือข่ายคอมพิวเตอร์ แบบ Multicast (single-to-many) ด้วย Ethernet Switch
- รองรับสัญญาณ HDMI ขาเข้าความละเอียดสูงสุด 4K@60
- รองรับสัญญาณ HDMI ขาออกความละเอียดสูงสุด 4K@30
- รองรับกำลังไฟฟ้า PoE
- รองรับการใช้งานด้วย Keyboard, Mouse ผ่านพอร์ต USB
- รองรับการส่งผ่านสัญญาณ IR และ RS-232
- รองรับการควบคุมด้วยปุ่มกดหน้าเครื่อง WebGUI, Telnet
- รองรับการควบคุมผ่านเครือข่ายคอมพิวเตอร์ ด้วยอุปกรณ์ควบคุม (CDPS-CS7)

IP Master Controller CDPS-CS7

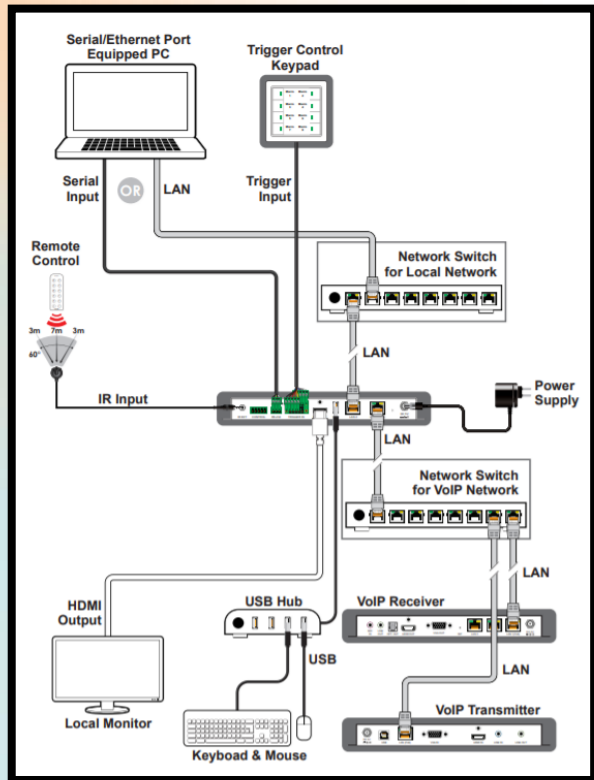

- รองรับการจัดการและตั้งค่าอุปกรณ์ CH-331H-TX ,CH-331H-RX , CH-U331TX,CH-U331RX ด้วย WebGUI
- รองรับการเลือกสัญญาณจากอุปกรณ์ TX ไปยัง อุปกรณ์ RX
- สามารถจัดกลุ่มแสดงผลที่กำหนดได้
- WebGUI แสดงสถานะของอุปกรณ์ TXและRX ที่มีการเชื่อมต่อทั้งหมด
- มีช่องสัญญาณ HDMI ขาออกแสดงผลหน้า WebGUI
- รองรับการเชื่อมต่อ Mouse, Keyboard ด้วยพอร์ต USB เพื่อใช้ควบคุม WebGUI
- รองรับกำลังไฟฟ้าด้วย PoE
- สามารถควบคุมผ่าน WebGUI ,RS-232, Telnet, และ IR รีโมท

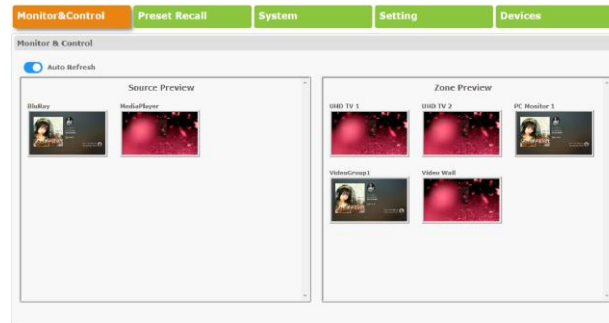



THANK YOU